




PVC HOSES

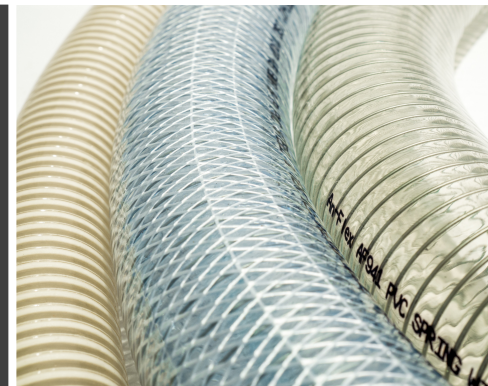

- 14** **PVC JACK HAMMER HOSE**
- 14** **PVC SPRING WIRE REINFORCED HOSE**
- 15** **PVC SUCTION & DELIVERY HOSE**
- 15** **PVC TRANSPARENT REINFORCED HOSE**
- 15** **PVC DURAFLEX LAYFLAT HOSE**
- 16** **PVC STEEL & TEXTILE REINFORCED HOSE**

AF924 - PVC Jack Hammer Hose



- Tube** : High Strength Fibre PVC
Cover : Abrasion & weather resistant plasticised PVC
Reinforcement : Spiral Polyester Yarn
Application : For use with air compressors in construction works, quarries and many civil engineering and industrial applications.
Standards : -
Temperature : -10°C to +60°C

Part No.	I.D		O.D	WP	Bend Radius
P/N	inch	mm	mm	bar	mm
AF924-06	3/8"	10	16	17	0.2
AF924-08	1/2"	12	20	17	0.22
AF924-12	3/4"	19	28	17	0.36
AF924-16	1"	25	33	14	0.54

AF941 - PVC Spring Wire Reinforced Hose



- Tube** : Non-toxic, transparent plasticised PVC
Cover : Abrasion & weather resistant plasticised PVC
Reinforcement : Spring Wire
Application : Use for suction and delivery of water, oil, liquid, gas, powder grinders, fruit juices, agricultures, chemical in shipyards, and industrial equipments. Can be used as a vacuum hose.
Standards : ISO 1307
Temperature : -5°C to +65°C

Part No.	I.D		O.D	WP	Bend Radius
P/N	inch	mm	mm	bar	mm
AF941-04	1/4"	6	11	11	0.12
AF941-05	5/16"	8	14	8	0.15
AF941-06	3/8"	10	16	8	0.20
AF941-08	1/2"	12	18	6	0.22
AF941-10	5/8"	15	22	6	0.31
AF941-12	3/4"	19	26	6	0.36
AF941-16	1"	25	33	6	0.54
AF941-20	1.1/4"	32	41	5	0.78
AF941-24	1.1/2"	38	48	5	1.05
AF941-32	2"	50	62	5	1.60
AF941-40	2.1/2"	63	80	4	2.80
AF941-48	3"	75	92	4	3.50
AF941-64	4"	102	120	4	4.80
AF941-80	5"	125	145	4	6.70
AF941-96	6"	152	172	4	7.50
AF941-128	8"	200	224	3	12.00


AF942 - PVC Suction & Delivery Hose (Clear)



- Tube** : Non-toxic, transparent plasticised PVC
- Cover** : Abrasion, weather, crushing and chemical resistant plasticised PVC
- Reinforcement** : PVC Spiral
- Application** : Suction & delivery of light chemicals. In agricultural, industry applications, construction and sanitary use.
- Standards** : -
- Temperature** : -5°C to +60°C

Part No.	I.D		O.D	WP	Bend Radius
P/N	inch	mm	mm	bar	mm
AF942-12	3/4"	19	25	7	0.28
AF942-16	1"	25	31	7	0.35
AF942-20	1.1/4"	32	39	7	0.55
AF942-24	1.1/2"	38	45	7	0.62
AF942-32	2"	50	58	6	0.95
AF942-40	2.1/2"	63	71	6	1.19
AF942-48	3"	75	84	6	1.56
AF942-64	4"	102	110	6	2.09
AF942-80	5"	125	136	4	3.18
AF942-96	6"	152	164	4	4.79
AF942-128	8"	200	216	4	6.80


AF943 - PVC Transparent Reinforced Hose

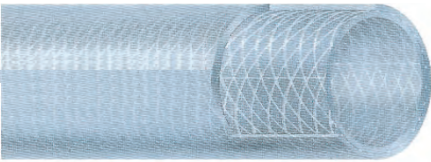

- Tube** : Non-toxic, transparent plasticised PVC
- Cover** : Abrasion & weather resistant plasticised PVC
- Reinforcement** : High Tensile Strength Synthetic Yarn
- Application** : Use as piping for industrial equipments and transfer of air and various kinds of fluids such as water, gasoline, oils and chemicals. Excellent for transportation of food materials.
- Standards** : ISO 1307
- Temperature** : -5°C to +65°C

Part No.	I.D		O.D	WP	Weight
P/N	inch	mm	mm	bar	kg/mtr
AF943-04	1/4"	6	11	10	0.09
AF943-05	5/16"	8	13	10	0.11
AF943-06	3/8"	10	14	10	0.09
AF943-08	1/2"	12	18	8	0.16
AF943-10	5/8"	15	22	8	0.19
AF943-12	3/4"	19	26	6	0.28
AF943-16	1"	25	32	6	0.36
AF943-20	1.1/4"	32	41	4	0.61
AF943-24	1.1/2"	38	48	4	0.71
AF943-32	2"	50	62	3	1.04


AF948 - PVC Duraflex Lay-flat Hose

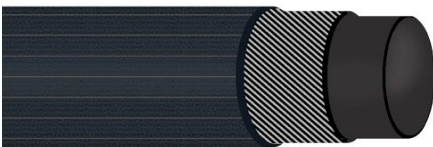

- Tube** : Black smooth PVC/nitrile
- Cover** : Black ribbed PVC/nitrile
- Reinforcement** : Woven Polyester and Nylon
- Application** : Transfer of air, water, slurries, chemical solution, oil & fuel. Use in sewage pump, drainage pump. irrigation installation, cable and sling protection cover etc
- Standards** : -
- Temperature** : -25°C to +80°C

Part No.	I.D		Wall Thickness	WP
P/N	inch	mm	mm	bar
AF948-16	1"	25	3	10
AF948-20	1.1/4"	32	2.4	10
AF948-24	1.1/2"	38	2.4	10
AF948-32	2"	50	2.4	10
AF948-40	2.1/2"	63	2.6	10
AF948-48	3"	75	2.9	10
AF948-64	4"	102	3	10
AF948-80	5"	125	3.4	10
AF948-96	6"	152	3.5	10
AF948-128	8"	200	3.8	10
AF958-160	10"	250	3.5	10

AF950 - PVC Steel & Textile Reinforced Hose

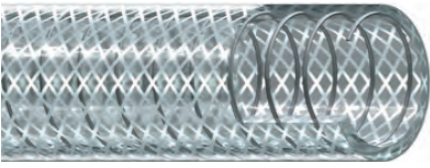

- Tube** : Non-toxic, transparent plasticised PVC
- Cover** : Abrasion, weather, crushing and chemical resistant plasticised PVC
- Reinforcement** : Galvanised spiral & high tensile
- Application** : Suction & delivery of water, mineral water, fruit juices and liquids etc. in shipyards, industries, buildings, agricultural and industrial machineries.
- Standards** : ISO 1307
- Temperature** : -5°C to +60°C

Part No.	I.D		O.D	WP	Bend Radius	Weight
P/N	inch	mm	mm	bar	mm	kg/m
AF950-12	3/4	19	28	15	85	0.45
AF950-16	1	25	36	15	90	0.68
AF950-20	1.1/4	32	42	15	110	0.80
AF950-24	1.1/2	38	50	15	130	1.15
AF950-32	2	50	64	15	170	1.60