




Quick Disconnect Couplings

SPIR STAR offers a variety of Quick Disconnect Couplings in multiple thread styles and working pressures up to 30,000 psi.




K
Quick Disconnect
Couplings



Screw Type Quick Disconnects - Stainless Steel


Part No.	Description	Max Working Pressure
CDQ-08-SET 15K	1/2" NPT Female Screw Together Quick Disconnect Set	15,000 psi

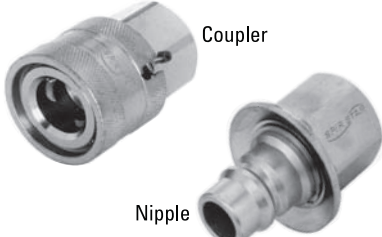

Push/Pull Type Quick Disconnects - Water Blast Service


Part No.	Description	Max Working Pressure
CDQ-08-FD-F 10K	1/2" NPT Female Push/Pull Quick Disconnect Coupler	10,000 psi
CDQ-08-FD-M 10K	1/2" NPT Male Push/Pull Quick Disconnect Set Nipple	10,000 psi

Quick Disconnect Couplings (High Pressure QDC for Hydraulic)




Screw Type Quick Disconnects - Hydraulic Service

Part No.	Description	Max Working Pressure
CPW-14-M 10K	1/4" NPT Male Screw Together Quick Disconnect Coupler	10,000 psi
CPW-38-M 10K	3/8" NPT Male Screw Together Quick Disconnect Coupler	10,000 psi
CPW-14-F 10K	1/4" NPT Female Screw Together Quick Disconnect Nipple	10,000 psi
CPW-38-F 10K	3/8" NPT Female Screw Together Quick Disconnect Nipple	10,000 psi



High Pressure Quick Disconnect Coupling for Hydraulic (Coupler)

Part No.	Description	Max Working Pressure
C1000-1202 15K	1/4" BSPP Female Coupler	15,000 psi
C1500-1202 20K	1/4" BSPP Female Coupler	20,000 psi
C200-1202 20K	1/4" BSPP Female Coupler	20,000 psi
C300-1202 30K	1/4" BSPP Female Coupler	30,000 psi



High Pressure Quick Disconnect Coupling for Hydraulic (Nipple)

Part No.	Description	Max Working Pressure
C1000-6202 10K	1/4" BSPP Female Nipple	15,000 psi
C1500-6202 20K	1/4" BSPP Female Nipple	20,000 psi
C200-6202 20K	1/4" BSPP Female Nipple	20,000 psi
C300-6202 30K	1/4" BSPP Female Nipple	30,000 psi



Quick Disconnect Female Couplers with Check Valve

Part No.	Description	Max Working Pressure
SPC600-0-M9 30K	Coupler W/Check Valve X 9/16"-18 Type M	30,000 psi
SPC600-0-M12 30K	Coupler W/Check Valve X 3/4"-16 Type M	30,000 psi
SPC600-0-M16 30K	Coupler W/Check Valve X 1"-12 Type M	30,000 psi
SPC600-0-MJ4 10K	Coupler W/Check Valve X 1/4" JIC Male	10,000 psi
SPC600-0-MJ6 10K	Coupler W/Check Valve X 3/8" JIC Male	10,000 psi
SPC600-0-MJ8 10K	Coupler W/Check Valve X 1/2" JIC Male	10,000 psi
SPC600-0-NM4 15K	Coupler W/Check Valve X 1/4" NPT Male	15,000 psi
SPC600-0-NM6 15K	Coupler W/Check Valve X 3/8" NPT Male	15,000 psi
SPC600-0-NM8 15K	Coupler W/Check Valve X 1/2" NPT Male	15,000 psi
SPC600-0-NF4 15K	Coupler W/Check Valve X 1/4" NPT Female	15,000 psi
SPC600-0-NF6 15K	Coupler W/Check Valve X 3/8" NPT Female	15,000 psi
SPC600-0-NF8 15K	Coupler W/Check Valve X 1/2" NPT Female	15,000 psi
SPC600-0-MP4 20K	Coupler W/Check Valve X 1/4" MP Male	20,000 psi
SPC600-0-MP6 20K	Coupler W/Check Valve X 3/8" MP Male	20,000 psi
SPC600-0-MP9 20K	Coupler W/Check Valve X 9/16" MP Male	20,000 psi
SPC600-0-HP4 30K	Coupler W/Check Valve X 1/4" HP Male	30,000 psi
SPC600-0-HP6 30K	Coupler W/Check Valve X 3/8" HP Male	30,000 psi
SPC600-0-HP9 30K	Coupler W/Check Valve X 9/16" HP Male	30,000 psi
SPC600-0-X13 30K	Coupler W/Check Valve X Low Angle Male	30,000 psi



Quick Disconnect Male Nipples with Check Valve

Part No.	Description	Max Working Pressure
SPC600-2-M9 30K	Nipple W/Check Valve X 9/16"-18 Type M	30,000 psi
SPC600-2-M12 30K	Nipple W/Check Valve X 3/4"-16 Type M	30,000 psi
SPC600-2-M16 30K	Nipple W/Check Valve X 1"-12 Type M	30,000 psi
SPC600-2-MJ4 10K	Nipple W/Check Valve X 1/4" JIC Male	10,000 psi
SPC600-2-MJ6 10K	Nipple W/Check Valve X 3/8" JIC Male	10,000 psi
SPC600-2-MJ8 10K	Nipple W/Check Valve X 1/2" JIC Male	10,000 psi
SPC600-2-NM4 15K	Nipple W/Check Valve X 1/4" NPT Male	15,000 psi
SPC600-2-NM6 15K	Nipple W/Check Valve X 3/8" NPT Male	15,000 psi
SPC600-2-NM8 15K	Nipple W/Check Valve X 1/2" NPT Male	15,000 psi
SPC600-2-NF4 15K	Nipple W/Check Valve X 1/4" NPT Female	15,000 psi
SPC600-2-NF6 15K	Nipple W/Check Valve X 3/8" NPT Female	15,000 psi
SPC600-2-NF8 15K	Nipple W/Check Valve X 1/2" NPT Female	15,000 psi
SPC600-2-MP4 20K	Nipple W/Check Valve X 1/4" MP Male	20,000 psi
SPC600-2-MP6 20K	Nipple W/Check Valve X 3/8" MP Male	20,000 psi
SPC600-2-MP9 20K	Nipple W/Check Valve X 9/16" MP Male	20,000 psi
SPC600-2-HP4 30K	Nipple W/Check Valve X 1/4" HP Male	30,000 psi
SPC600-2-HP6 30K	Nipple W/Check Valve X 3/8" HP Male	30,000 psi
SPC600-2-HP9 30K	Nipple W/Check Valve X 9/16" HP Male	30,000 psi
SPC600-2-X13 30K	Nipple W/Check Valve X Low Angle Male	30,000 psi
SPC600-XX 30K	Check Valve With Back Blank	30,000 psi



Quick Disconnect Male Nipples without Check Valve

Part No.	Description	Max Working Pressure
SPC600-1-M9 30K	Nipple W/O Check Valve X 9/16" -18 Type M	30,000 psi
SPC600-1-M12 30K	Nipple W/O Check Valve X 3/4" -16 Type M	30,000 psi
SPC600-1-M16 30K	Nipple W/O Check Valve X 1" -12 Type M	30,000 psi
SPC600-1-MJ4 10K	Nipple W/O Check Valve X 1/4" JIC Male	10,000 psi
SPC600-1-MJ6 10K	Nipple W/O Check Valve X 3/8" JIC Male	10,000 psi
SPC600-1-MJ8 10K	Nipple W/O Check Valve X 1/2" JIC Male	10,000 psi
SPC600-1-NM4 15K	Nipple W/O Check Valve X 1/4" NPT Male	15,000 psi
SPC600-1-NM6 15K	Nipple W/O Check Valve X 3/8" NPT Male	15,000 psi
SPC600-1-NM8 15K	Nipple W/O Check Valve X 1/2" NPT Male	15,000 psi
SPC600-1-NF4 15K	Nipple W/O Check Valve X 1/4" NPT Female	15,000 psi
SPC600-1-NF6 15K	Nipple W/O Check Valve X 3/8" NPT Female	15,000 psi
SPC600-1-NF8 15K	Nipple W/O Check Valve X 1/2" NPT Female	15,000 psi
SPC600-1-MP4 20K	Nipple W/O Check Valve X 1/4" MP Male	20,000 psi
SPC600-1-MP6 20K	Nipple W/O Check Valve X 3/8" MP Male	20,000 psi
SPC600-1-MP9 20K	Nipple W/O Check Valve X 9/16" MP Male	20,000 psi
SPC600-1-HP4 30K	Nipple W/O Check Valve X 1/4" HP Male	30,000 psi
SPC600-1-HP6 30K	Nipple W/O Check Valve X 3/8" HP Male	30,000 psi
SPC600-1-HP9 30K	Nipple W/O Check Valve X 9/16" HP Male	30,000 psi
SPC600-1-X13 30K	Nipple W/O Check Valve X Low Angle Male	30,000 psi